




DIN 1476

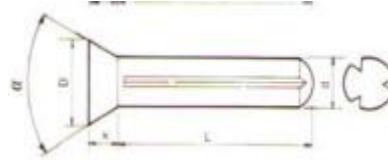

DIN 1477

Désignation :

une goupille cannelée à tête demi-ronde, \varnothing nominal 4 mm et 12 mm de longueur de tige L = DIN 1476 A
 $\varnothing 4 \times 12$.

\varnothing nominal d	2	3	4	5	6	8	10	12	16	20	
Tolérance d	0	0	0	0	0	0	0	0	0		
	-0,005	-0,075	-0,10	-0,10	-0,10	-0,15	-0,15	-0,20	-0,20	-0,20	
DIN 1476	D	3,5	5,2	7	8,8	10,5	14	16	19	25	32
	k	1,2	1,8	2,4	3	3,6	4,8	6,5	7,5	10	13
DIN 1477	D	3,5	5,2	7	8,8	10,5	14	16	19	26	31,5
	k	1	1,4	2	2,5	3	3,9	4	4,6	6,5	9,5
	α	75°	75°	75°	75°	75°	75°	75°	75°	75°	60°
L mm											
3											
4											
5											
6											
8											
10											
12											
16											
20											
25											
30											
35											
40											
Emball.											