



# ARTICLE 904720 A2 TX VIS À BOIS À TÊTE PLATE AVEC ENCOCHE ET FILETAGE PARTIEL

ITEM 904720 A2 TX  
PAN WASHER HEAD TIMBER SCREWS WITH CUTTING POINT WITH PARTIAL THREAD

### APPLICATIONS:

Idéale pour les vissages en extérieur, comme par exemple panneaux solaires, abri de garage, balcons, passerelles, équipements de jeu, maisons préfabriquées et tous les éléments porteurs.

Une profondeur de vissage de 4 fois le diamètre est requise. Une profondeur de vissage de 8 fois le diamètre serait l'idéal. Une profondeur de plus de 12 fois le diamètre ne peut pas être prise en compte dans les calculs.

### USES:

*Ideal for Outdoor screw connections such as solar equipment, car ports, balconies, steps, playground equipment, prefabricated houses and all supporting components*


*A minimum screw-in depth of 4x the diameter must be ensured. A screw-in depth of 8x the diameter should ideally be achieved. More than 12x the diameter must not be included in calculations.*

### CARACTÉRISTIQUES:

- Filetage partiel
- Vis à bois à tête plate
- Tête plate Ø 15 mm / Ø 20 mm
- Encoche
- Revêtement glissant spécial
- Entraînement TX à six lobes internes

### FEATURES:

- partial thread
- Flat head - timber construction screw
- Flat head Ø 15mm / Ø 20 mm
- Cutting score
- Special smooth coating
- TX driving feature

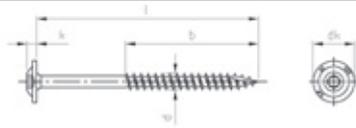

d	6	8
<b>l/mm</b>	Réf. / Item no.	Réf. / Item no.
30		90472080 30
40		90472080 40
50		90472080 50
60	90472060 60/36	90472080 60/50
70	90472060 70/42	90472080 70/50
80	90472060 80/48	90472080 80/72
90	90472060 90/54	90472080 90/80
100	90472060 100/70	90472080 100/80
120	90472060 120/70	90472080 120/80
140	90472060 140/70	90472080 140/80
160	90472060 160/70	90472080 160/80
180		90472080 180/80
200		90472080 200/80
250		90472080 250/80
300		90472080 300/80
350		90472080 350/80
400		90472080 400/80
	100	100 ≥ 120 50
<b>k</b>	4	4,5
<b>dk</b>	15	20
<b>Entraînement</b>	TX25	TX40



ETA - 11/0283