


ENGLISH	FRANÇAIS	DEUTSCH	CZECH
Insert / Knurled	Ecrou / Cranté	Einnietmutter / Gerillt	nýtovací matice / s rýhovaným dřikem
Reduced countersunk head	Tête réduite à 90°	Kleiner senkkopf	redukováaná hlava
Steel + zinc plated	Acier zingué	Stahl	ocel

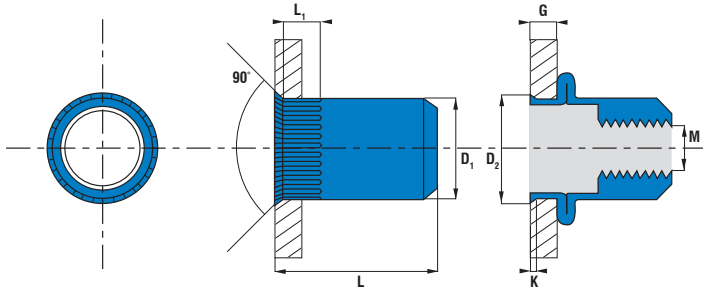

PART NO/REF	M	D ₁	D ₂	K	L	L ₁	G
	Ø (mm)	Ø (mm)	Ø (mm)	(mm)	(mm)	(mm)	min-max (mm)
TCR0430	M4	5.9	7.0	0.6	10.0	4.0	0.5-3.0
TCR0530	M5	6.9	8.0	0.6	11.5	4.0	0.5-3.0
TCR0630	M6	8.9	10.0	0.6	14.0	4.0	0.5-3.0
TCR0830	M8	10.9	12.0	0.6	15.5	4.0	0.5-3.0
TCR1035	M10	12.9	13.5	0.8	19.5	4.5	0.8-3.5

	DRILLING	RECOMMENDED MAX TORQUE	PULL-OUT	SHEAR
M (mm)	(mm)	(Nm)	(N)	(N)
M4	6.0	4.0	6 600	1 600
M5	7.0	5.0	9 200	2 200
M6	9.0	15.0	17 000	2 400
M8	11.0	18.0	22 000	2 900
M10	13.0	30.0	32 400	4 300