




Techniques de Fixation  
et d'assemblages

# VIS TARAUDEUSE TC TRILOBEE POUR ACIER-ALU-PLASTIQUE

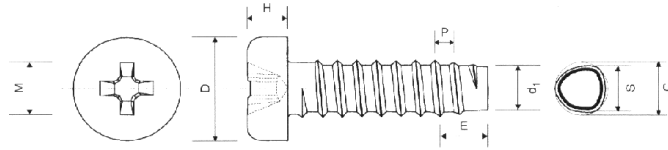

**REF: S 9091 A**

Size		M1.4	M1.6	M1.7	M2	M2.3	M2.6
PAN HEAD	D	2.5	2.8	3	3.5	4	4.5
	H	0.8	0.85	0.9	1.0	1.1	1.2
	M	1.65	1.8	1.9	2.1	2.2	2.2

THREAD SIZE		M1.4	M1.6	M1.7	M2	M2.3	M2.6
	PITCH (P)	0.45	0.5	0.5	0.64	0.8	0.92
	D1 max	0.92	1.04	1.14	1.36	1.86	2.21
	E max	1.10	1.25	1.25	1.5	2	2.3
	C max	1.43	1.63	1.73	2.04	2.34	2.64
	S max	1.37	1.56	1.66	1.96	2.26	2.55

## Lengths and material available

Lengths (L)	M1.4	M1.6	M1.7	M2	M2.3	M2.6
3	●	●				
4	●	●	●	●	●	
5	●	●	●	●	●	●
6	●	●	●	●	●	●
8		●	●	●	●	●
10				●	●	●
12				●	●	●
16				●		

● = Case Hardened Steel Plated

Recommended hole sizes*	In Aluminium	1.23	1.41	1.51	1.75	2.1	2.3
	In Plastic	1.1	1.3	1.4	1.67	1.95	2.25
	In Mild Steel	1.2	1.35	1.45	1.7	2.05	2.25

